

PROGRAM 2014

FERRI[®]



www.ferrisrl.it - www.icut4.com



iCUT4

Nuova trinciatrice radiocomandata

*ideale per la manutenzione di:
argini e scarpate, zone delimitate,
aree comunali e servizi pubblici.*

Potenza e controllo nelle tue mani



www.icut4.it



1,00 m
1,35 m

49 HP

New radio controlled slope mower. **Power** and **Control** in your hands.

iCUT4 is ideal for the maintenance of:
River banks and embankments,
Restricted areas, Municipal areas
and public services.

Nouveau Broyeur pour herbe radiocommandé. *La puissance et le contrôle entre tes mains.*

*iCUT4, est idéal pour: Berges et talus,
Zones délimitées, Espaces communaux et
services publics.*

Der neue ferngesteuerte Geräteträger.

Macht und **Kontrolle**
in Ihren Hände.

Einsatzgebiet: Deiche und Dämme,
Abgegrenzte Gebiete, Kommunalgebiete
und öffentliche Dienste (Parken, Schüle,
Umspannwerke, Telekommunikation).

La nueva trituradora radio dirigida. **Potencia** y **control** en tus manos.

*iCUT4 ideal para el mantenimiento de
terraplenes y taludes, zonas restringidas,
áreas municipales y servicios públicos.*

*Trinciatrici
Shredders
Broyeurs
Mulcher
Trituradoras*

ME - MER	04
MT - MTR	04
MC	04
F	04
MH	04



MKD	04
-----	----

*Trinciatrici forestali
Forestry mulchers
Broyeurs forestiers
Forstmulcher
Trituradoras forestales*

TFC/R	05
TFC/F	05
TFC-DT/R	05
TFC-DT/F	05

*Trinciatrici Laterali
Forestry mulchers
Broyeurs forestiers
Forstmulcher
Trituradoras Laterales/
Centradas*

ZME	06
ZMT Farming	06
ZMTE Farming	06
ZTE Farming	06
ZL Dynamic	07



ZLE Dynamic	07
-------------	----

ZHE	07
-----	----

TLP	07
-----	----

TA	08
----	----

TD	08
----	----



T460	08
------	----



T470P	08
-------	----

TM Dual - Farm	09
----------------	----

TP Farm	09
---------	----

TPE Evo	09
---------	----

TPE Evo Vision	09
----------------	----



TSH Energy	10
------------	----



TSH Power	10
-----------	----

TSP Energy - TSP Energy Vision	10
--------------------------------	----

TSP Power - TSP Power Vision	10
------------------------------	----

TGA	11
-----	----

TXV Energy	11
------------	----

TST Tris - Electra	11
--------------------	----

TKZ	11
-----	----

THD	12
-----	----



TKD	12
-----	----



TKP	12
-----	----

TV	12
----	----

TKV	13
-----	----

BSV	13
-----	----

SKI	13
-----	----

DKI Frisbee	13
-------------	----

Comandi - Controls - Commandes - Steuerung - Mandos	14
---	----

Accessori - Implements - Accessoires - Attachments - Accesorios	14
---	----



Testate trincianti - Flail heads - Groupes de broyage Mähköpfe - Cabezales de corte	15
--	----

www.ferrisrl.it
www.icut4.com

FERRI®

Trinciatrici - Shredders - Broyeurs - Mulcher - Trituradoras



MER

ME

20 ÷ 30 HP

ME/MER125 m 1,25/4'1"
ME/MER155 m 1,55/5'1"



MTR

MT

30 ÷ 70 HP


MT/MTR140 m 1,40/4'7"
MT/MTR160 m 1,60/5'3"
MT/MTR180 m 1,80/5'10"
MT/MTR200 m 2,00/6'6"



MC

55 ÷ 80 HP


MC180 m 1,80/5'10"
MC210 m 2,10/6'10"



F

70 ÷ 100 HP


F230 m 2,23/7'3"
F270 m 2,69/8'10"
F300 m 3,03/9'11"



MH

70 ÷ 130 HP


MH230 m 2,36/7'9"
MH250 m 2,56/8'4"
MH280 m 2,76/9'0"
MH300 m 2,96/9'8"



MKD

75 ÷ 130 HP

MKD2300 m 2,30/7'6"
MKD2500 m 2,50/8'2"
MKD2800 m 2,74/8'11"



Professional Line

TFC/R

70 ÷ 140 HP

TFC/R1600 m 1,60/5'2"
TFC/R1800 m 1,80/5'10"
TFC/R2000 m 2,00/6'6"
TFC/R2200 m 2,20/7'3"

Ø max cm 20/8"



TFC/F

80 ÷ 140 HP

TFC/F1600 m 1,60/5'2"
TFC/F1800 m 1,80/5'10"
TFC/F2000 m 2,00/6'6"
TFC/F2200 m 2,20/7'3"

Ø max cm 25/10"



TFC-DT/R

120 ÷ 180 HP

TFC-DT/R2000 m 2,00/6'6"
TFC-DT/R2200 m 2,20/7'3"

Ø max cm 30/12"



TFC-DT/F

120 ÷ 180 HP

TFC-DT/F2000 m 2,00/6'6"
TFC-DT/F2200 m 2,20/7'3"

Ø max cm 40/16"





ZME

18 ÷ 40 HP

ZME125 m 1,25/4'1"
ZME155 m 1,55/5'1"

ZME125 m 1,74/5'9"
ZME155 m 2,04/6'8"
(+90/-50°)




ZMT

FARMING

50 ÷ 80 HP

ZMT1600 m 1,64/5'4"
ZMT1800 m 1,84/6'0"
ZMT2000 m 2,04/6'8"

ZMT1600 m 2,22/7'3"
ZMT1800 m 2,42/7'11"
ZMT2000 m 2,62/8'7"
(+90/-45°)

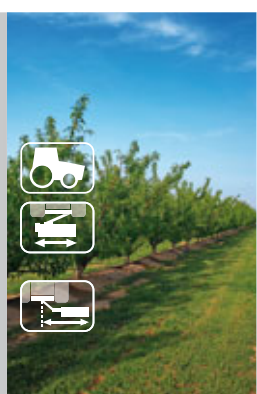


ZMTE

FARMING

50 ÷ 80 HP

ZMTE1600 m 1,64/5'4"
ZMTE1800 m 1,84/6'0"
ZMTE2000 m 2,04/6'8"

ZMTE1600 m 2,80/9'2"
ZMTE1800 m 3,00/9'10"
ZMTE2000 m 3,20/10'6"
(+90/-45°)

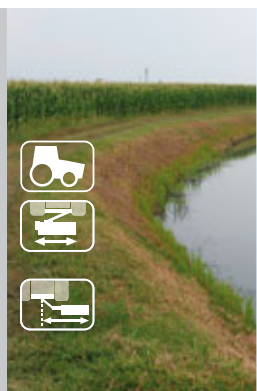

extra reach

ZTE

FARMING

70 ÷ 80 HP

ZTE2300 m 2,25/7'5"

ZTE2300 m 3,27/10'9"
(+90/-45°)





50 ÷ 100 HP

ZL1600 m 1,60/5'3"
ZL1800 m 1,80/5'10"
ZL2000 m 2,00/6'6"

ZL1600 m 2,20/7'3"
ZL1800 m 2,40/7'11"
ZL2000 m 2,60/8'6"
(+90/-60°)



50 ÷ 100 HP

ZLE1600 m 1,60/5'3"
ZLE1800 m 1,80/5'10"
ZLE2000 m 2,00/6'6"

ZLE1600 m 2,80/9'2"
ZLE1800 m 3,00/9'10"
ZLE2000 m 3,20/10'6"
(+90/-60°)



100 ÷ 160 HP


ZHE2500
m 2,50/8'2"

ZHE2500
m 3,67/12'0"
(+90/-60°)



70 ÷ 120 HP

TLP160
m 3,23/10'7"
TLP160A m 3,23/10'7"
TLP200 m 3,59/11'9"
TLP250 m 4,13/13'6"
(+90/-70°)

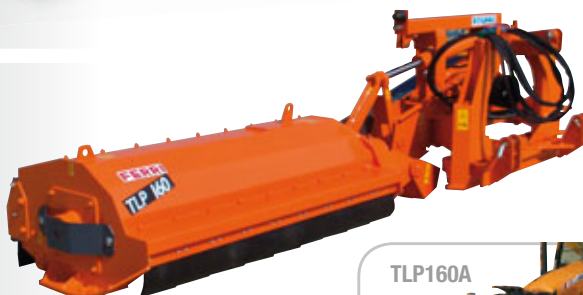

TLP160A

Trinciatrici Laterali/Centrali - Central and offset mowers - Broyeur d'accotement à 3 positions
Trituradoras Laterales/Centradas - Zentral- und seitlicher Mulcher

Professional Line

FERRI[®]

Decespugliatrici Idrauliche - Hydraulic reach mowers - Débroussaileuses hydrauliques
- Triduradoras de brazo hidráulico - Hydraulische Böschungsmäher



TAR32



TA

20 ÷ 40 HP

TA26 m 2,70/8'10"
TA32 m 3,24/10'6"
TAR32 m 3,24/10'6"



TDR



TD

40 ÷ 70 HP

TD37 m 3,70/12'2"
TDR37 m 3,70/12'2"
TD42 m 4,23/13'10"
TDR42 m 4,23/13'10"



new

T460

SMART

50 ÷ 60 HP

T460 Smart Country
m 4,56/14'11"
T460 Smart Dual
m 4,60/15'1"



new

T470P

SMART

50 ÷ 80 HP

T470P Smart Dual
m 4,64/15'2"
T470P Smart Farm
m 4,66/15'3"





TM

50 ÷ 80 HP

TM46 Farm m 4,56/15'0"
TM46 Dual m 4,60/15'1"
TM56 Farm m 5,48/18'0"
TM56 Dual m 5,50/18'0"



FERRI



TP
FARM

60 ÷ 90 HP

TP51 Farm
m 4,82/15'9"
TP61 Farm
m 5,92/19'5"



TPE
EVO

60 ÷ 90 HP

TPE500 Evo m 4,85/15'11"
TPE600 Evo m 5,96/19'6"



vision
TPE
EVO

60 ÷ 80 HP

TPE520 Evo Vision
m 5,23/17'2"



Decespugliatrici Idrauliche - Hydraulic reach mowers - Débroussailluses hydrauliques
- Tridadoras de brazo hidráulico - Hydraulische Böschungsmäher

FERRI®

Decespugliatrici Idrauliche - Débroussaileuses hydrauliques
Triduratoras de brazo hidráulico - Hydraulische Böschungsmäher



Dual Way

new


TSH
ENERGY

90 ÷ 120 HP

TSH610Z Energy
m 6,05/19'10"

TSH620 Energy
m 6,15/20'2"

TSH720Z Energy
m 7,19/23'7"

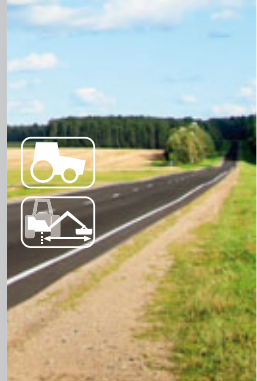

Dual Way

new


TSH
POWER

90 ÷ 120 HP

TSH610Z Power
m 6,05/19'10"

TSH620 Power
m 6,15/20'2"

TSH720Z Power
m 7,19/23'7"

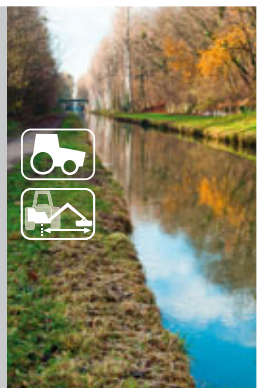

TSP500 Vision Energy



TSP
ENERGY

80 ÷ 110 HP

TSP530 Energy
m 5,34/17'6"

TSP500 Vision Energy
m 5,11/16'9"

TSP550 Vision Energy
m 5,52/18'1"



TSP500 Vision Power



TSP
POWER

80 ÷ 110 HP

TSP530 Power m 5,34/17'6"
TSP610Z Power m 6,12/20'1"

TSP500 Vision Power
m 5,11/16'9"

TSP550 Vision Power
m 5,52/18'1"






TGA

90 ÷ 110 HP

TGA58Z m 5,80/19'0"



FERRI®

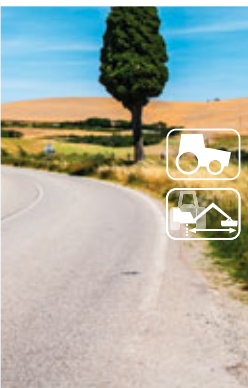


TXV

ENERGY

80 ÷ 110 HP

TXV50 Energy
m 5,24/17'2"

TXV60 Energy
m 6,25/20'6"

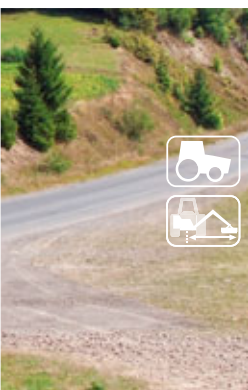

TST

90 ÷ 110 HP

TST50 Tris
m 4,84/15'10"



TKZ

ENERGY

TKZ

POWER

110 ÷ 130 HP

TKZ80
m 8,15/26'8"



Decesugliatrici Idrauliche - Hydraulic reach mowers - Débroussailluses hydrauliques
Tridadoras de brazo hidráulico - Hydraulische Böschsmäher

Professional Line

FERRI®

Decespugliatrici Idrauliche - Débroussaileuses hydrauliques
Triduradoras de brazo hidráulico - Hydraulische Böschungsmäher

Professional Line



THD

EAGLE

100 ÷ 120 HP

THD520 Eagle m 5,59/18'4"




new

TKD

EAGLE

110 ÷ 130 HP

TKD560 Eagle m 6,10/20'0"

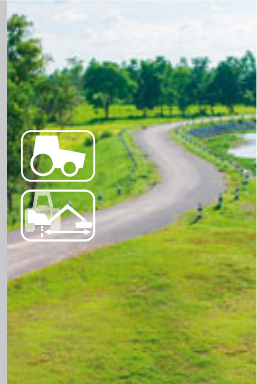

new

TKP


EAGLE

110 ÷ 150 HP

TKP710 Eagle m 7,06/23'2"

TKP830 Eagle m 8,30/27'23"

TKP930 Eagle m 9,30/30'51"

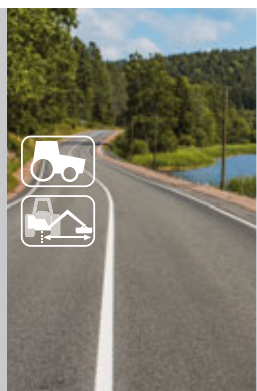


TV

POWER

80 ÷ 120 HP

TV55 m 5,52/18'1"

TV62 m 6,23/20'5"

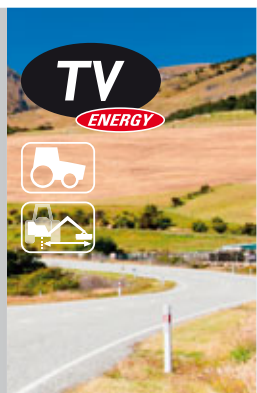



TKV
ENERGY POWER

90 ÷ 110 HP

TKV65 m 6,54/21'5"



FERRI



BSV
ENERGY POWER

100 ÷ 180 HP

BSV8
m 8,70/28'6"

BSV10
m 10,40/34'1"

BSV12 m
12,10/39'8"



SKI DX

90 ÷ 110 HP

SKI dx m 1,20/3'11"
SKI dx-sx m 1,20/3'11"



SKI dx-sx



DKI

80 ÷ 110 HP

DKI m 0,80/2'62"



Decespugliatrici Idrauliche - Hydraulic reach mowers - Débroussaileuses hydrauliques
Tridadoras de brazo hidráulico - Hydraulische Böschungsmäher

Professional Line

FERRI®

classic



Comando con cavi flessibili.
Cable controls.
Commandes par câbles téléflexibles.
Steuerungen mit Kabeln.
Mandos por cables flexibles.

electra



Comando elettrico monoleva.
"Soft-Start" Mono lever electric controls.
Commande électrique monolevier.
Elektrisch Steuerungen.
Mandos eléctricos.

comfort



Comando a bassa pressione proporzionale.
Electro-hydraulic proportional controls.
Commande basse pression proportionnelle monolevier.
Proportionale Niederdrucksteuerungen.
Mandos a baja presión proporcionales.

comfort plus



Comando elettro-idraulico proporzionale.
Electro-hydraulic proportional controls.
Commande électro-hydraulique basse pression monolevier.
Proportionale elektrohydraulische Steuerungen.
Mandos electro-hidraulicos proporcionales.

advance Tronic



Comando elettronico proporzionale.
Electronic proportional controls.
Commande électronique proportionnelle monolevier.
Elektronische proportionale Steuerung.
Mandos electrónicos proporcionales.

advance Tronic LS



Comando elettronico proporzionale "Load Sensing".
Electronic proportional controls "Load Sensing".
Commande électronique proportionnelle monolevier "Load Sensing".
Elektronische proportionale Steuerung "Load Sensing".
Mandos electrónicos proporcionales "Load Sensing".



TR13-TR22

Troncitrice - Cutter bar - Sécateur
Astschere - Cortadora
Ø max 8 cm / 3 1/4"



CS150

Cimatrice per siepi - Cutter bar
Tailleuse de haies - Heckenschneider
Barra de corte
Ø max 1 cm / 1/2"



CSP150

Cimatrice per siepi - Cutter bar
Tailleuse de haies - Heckenschneider
Barra de corte
Ø max 2 cm / 1"




FF45-FF60

Fresa fossi - Ditch cleaners
Cureuse de fossées
Grabenfräse - Ahoyador
45-60 cm / 1'5" - 1'11"



SE31

Soffiatore - Blower - Souffleur
Gebläse - Soplador
Ø 30 cm / 11 3/4"



Testate Trincianti
Flail Heads
Groupes De Broyage
Mähköpfe
Cabezales De Corte



TME
TME80 m 0,80/32" kg 80/176 lb



TIL
TIL100 m 1,00/39" kg 120/265 lb



TIM
TIM110 m 1,05/41" kg 133/293 lb



TI
TI100 m 1,00/39" kg 175/385 lb
TI120 m 1,20/47" kg 210/463 lb



TJ
TJ125 m 1,25/49" kg 240/529 lb



TN
TN100 m 1,00/39" kg 265/584 lb
TN120 m 1,20/47" kg 285/628 lb



TNS
TNS125 m 1,25/49" kg 290/639 lb



TNH
TNH125 m 1,25/49" kg 315/695 lb

Trasmissione a cinghia
Belt drive
Transmission par courroie
Riemenantrieb
Transmisión por correa



TJC
TJC125 m 1,25/49" kg 262/578 lbs



TNSC
TNSC125 m 1,25/49" kg 315/694 lbs





TNHC
TNHC125 m 1,25/49" kg 345/761 lb



TNP
TNP125 m 1,25/49" kg 376/829 lb
TNP1600 m 1,55/61" kg 379/830 lb



Program 2014 - rev 0 - 10000 - campbelladv.com 16013

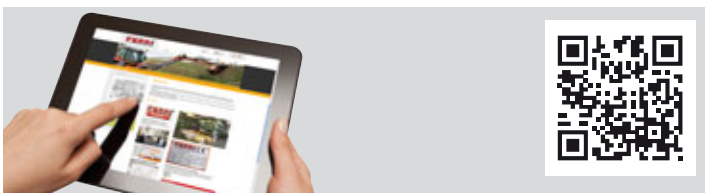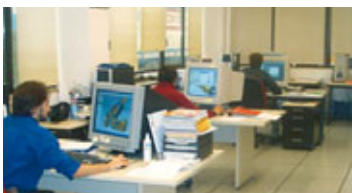

Tutti i dati sono indicativi e non impegnativi - All data subject to change - Toutes les données sont à titre indicatif et non contractuelles
Todos los datos son orientativos y están sujetos a cambio sin previo aviso - Sämtliche Angaben nur richtungsweise und unverbindlich

www.ferrisrl.it - www.icut4.com



Organismo accreditato da ACCREDIA
Società accreditata da ACCREDIA



FERRI srl
Via Govoni, 30
44034 Tamara (FE) Italy
Tel. +39 0532 866866
Fax +39 0532 866851
info@ferrisrl.it
www.ferrisrl.it - www.icut4.com



FERRI France
Plaine de Fontgrave
81800 RABASTENS
Tél. 05 63 40 84 00
Fax 05 63 40 84 08
contact@ferri-france.fr
www.ferri-france.fr